




**AMERICAN SPECIALTIES, INC.**  
 441 Saw Mill River Road, Yonkers, NY 10701  
 (914) 476.9000 • (914) 476.0688  
 www.americanspecialties.com

**MODEL №:** 105

**ISSUED:** 1-87

**REVISED:** 10 MAR 2017

**SURFACE MOUNTED SECURITY FRAMED MIRROR**

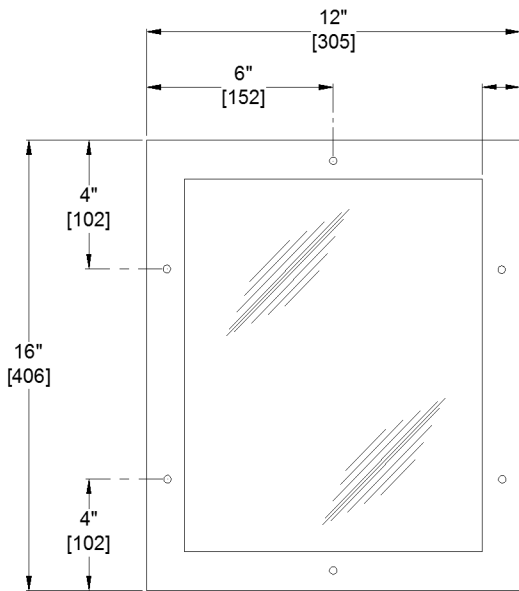


ELEVATION

1-1/4"  
[32]  
TYP FRAME

(6) 1/4-20x2" [M6x50] LONG TORX-PIN  
HEAD MACHINE SCREWS (SUPPLIED)

**NOTE:**  
ALL DIMS  
INCH [MM]

N.T.S.

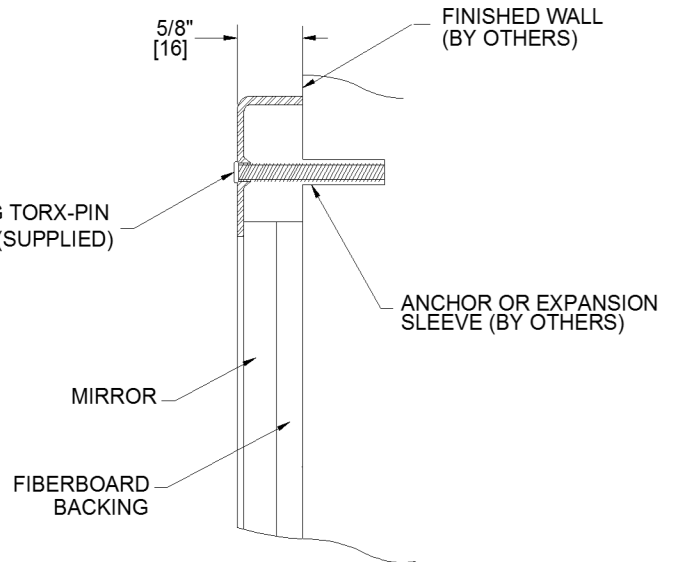

INSTALLATION DETAIL

**SPECIFICATION**

Surface Mounted Security Framed Mirror shall have frame fabricated of 14 gauge alloy 18-8 stainless steel, type 304. Structural assembly of frame components shall be of welded construction with six (6) mounting holes. All exposed surfaces shall be satin finish and be protected during shipment with PVC film easily removable after installation. Mirror glazing will be as specified in the Glazing Options chart below. Unit will be provided with fiberboard backing.

**Surface Mounted Security Framed Mirror shall be Model № 105-\_\_\_\_ {insert glazing code} as manufactured by American Specialties, Inc. 441 Saw Mill River Road Yonkers, New York 10701-4913**

**INSTALLATION**

Unit is surface mounted to wall or partition using six (6) 1/4-20x2" [M6x50] long pin-Torx head machine screws (supplied) into suitable anchors (by others) or alternate wall preparation (by others). Suggested mounting height for general service is 74" [1880] maximum above finished floor (MAX AFF) to top of frame. Bottom edge of reflecting surface should be no higher than 40" [1016] MAX AFF for compliance with 2010 ADA Accessibility Standards.

**GLAZING OPTIONS**

Specify glazing option from chart below by adding code suffix to model number (e.g. 105-14).

<b><u>GLAZING OPTIONS</u></b>			
<b>Suffix</b>	<b>Material</b>	<b>Finish</b>	<b>Image Quality</b>
13	1/4" thick tempered glass	Polished mirror	Good
14	20 gauge type 304 stainless steel	№ 8 mirror polish	Good
17	1/4" thick Plexiglas	Polished mirror	Very Good