Mounting Plate Instructions

Model MLP200



Installer

To assure you install this model easily and correctly, PLEASE READ THESE SIMPLE INSTRUCTIONS BEFORE STARTING THE INSTALLATION. CHECK YOUR INSTALLATION FOR COMPLIANCE WITH PLUMBING, ELECTRICAL AND OTHER APPLICABLE CODES. After installation, keep these instructions for future reference.

IMPORTANT

ALL SERVICE TO BE PERFORMED BY AN AUTHORIZED SERVICE PERSON

Elkay - www.elkay.com Halsey Taylor - www.halseytaylor.com

BERLS.COM

PAGE 1


98370C (Rev. B - 08/16)

This Mounting Plate System is designed for use with the following models: EMABF-TL, EZ-TL, HAC-BL, HTVZ-BL, HVR-BL, and VRC-TL.

Parts List

Refer to the illustration to make sure you receive the required mounting plate parts. If any parts are missing, contact customer service at 1.800.476.4106.

			1
ITEM NO.	QTY.	PART NO.	DESCRIPTION
1	32	110041643890	Hex Nut 1/4-20
2	12	110175443890	Hex Nut 3/8-16
3	1	28779C	Upper Mounting Plate
4	1	28780C	Lower Mounting Plate
5	2	28781C	Support Column Assy.
6	6	75707C	U-Bolt 3/8-16 UNC 2A
7	8	75711C	Threaded Rod 1/4-20 x 6 In.
8	32	75544C	Flat Washer 1/4 In.
9	12	75545C	Flat Washer 3/8 In.

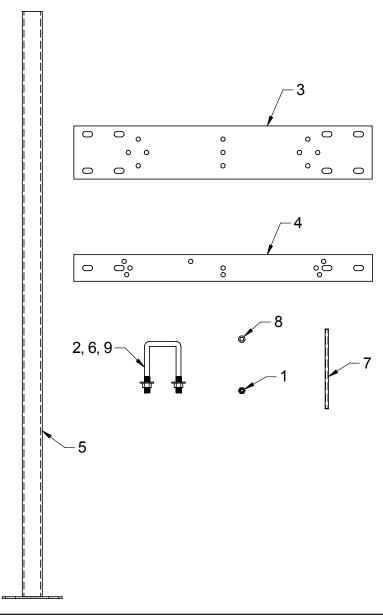

98370C (Rev. B - 08/16)


PAGE 2

Elkay - www.elkay.com Halsey Taylor - www.halseytaylor.com

.50 x .75 OBROUND (4) EMABF-TL, HAC-BL, HVR-BL, and VRC-TL Models - For electrical, waste, and water 2 I/2" 64mm supply locations please refer to the Installation/ Owners Manual for the specific unit. 1/2" 13mm 3 I/4" 83mm 5/8" 16mm 4 I/2" ||4mm **DETAIL A** MTG. HOLES FOR THREADED RODS 0 0 0 MTG. HOLES FOR THREADED RODS ္စီ 0 0 00 SEE DETAIL A MOUNTING PLATES FINISHED WALL -INSTALLED BEHIND 18 I/I6" 459mm FINISHED WALL **4 3/4" MAX HANGER BRACKET 121mm FURNISHED WITH COOLER. SEE COOLER ROUGH-IN FOR CORRECT BRACKET HEIGHT. 5/8" 16mm 44 İ/8" 1121mm MOUNTING PLATES INSTALLED BEHIND 35 İ/2" 902mm 25mm FINISHED WALL ္စစ -0 29" 737mm 25mm • ರ್ಯೆ *27" · 687mm 18 7/8" 479mm VRC-TL 12 3/8" 314mm SHOWN FINISHED FLOOR * ADA REQUIREMENT - REDUCE HEIGHT BY 3" FOR INSTALLATION OF CHILDRENS ADA COOLER. ** WITH STANDARD STUD LENGTH OF 6 INCHES. NOTE - AFTER INSTALLATION, U-BOLTS AND THREADED RODS MAY NEED TO BE TRIMMED.

Elkay - www.elkay.com Halsey Taylor - www.halseytaylor.com PAGE 3

98370C (Rev. B - 08/16)

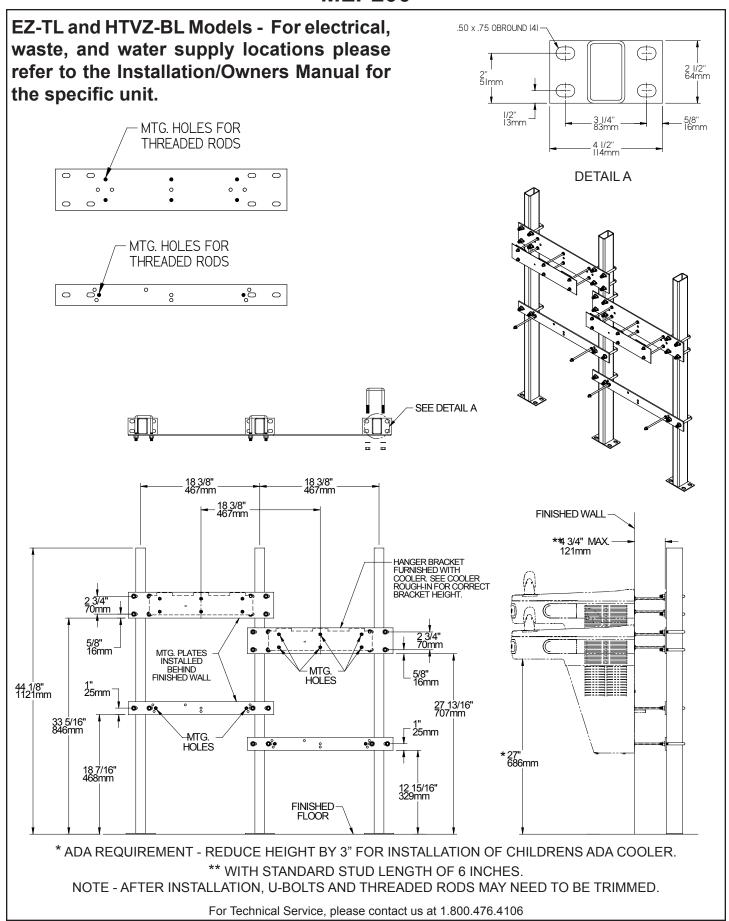

98370C (Rev. B - 08/16) PAGE 4 Elkay - www.elkay.com Halsey Taylor - www.halseytaylor.com